






Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico -
График грузоподъёмности



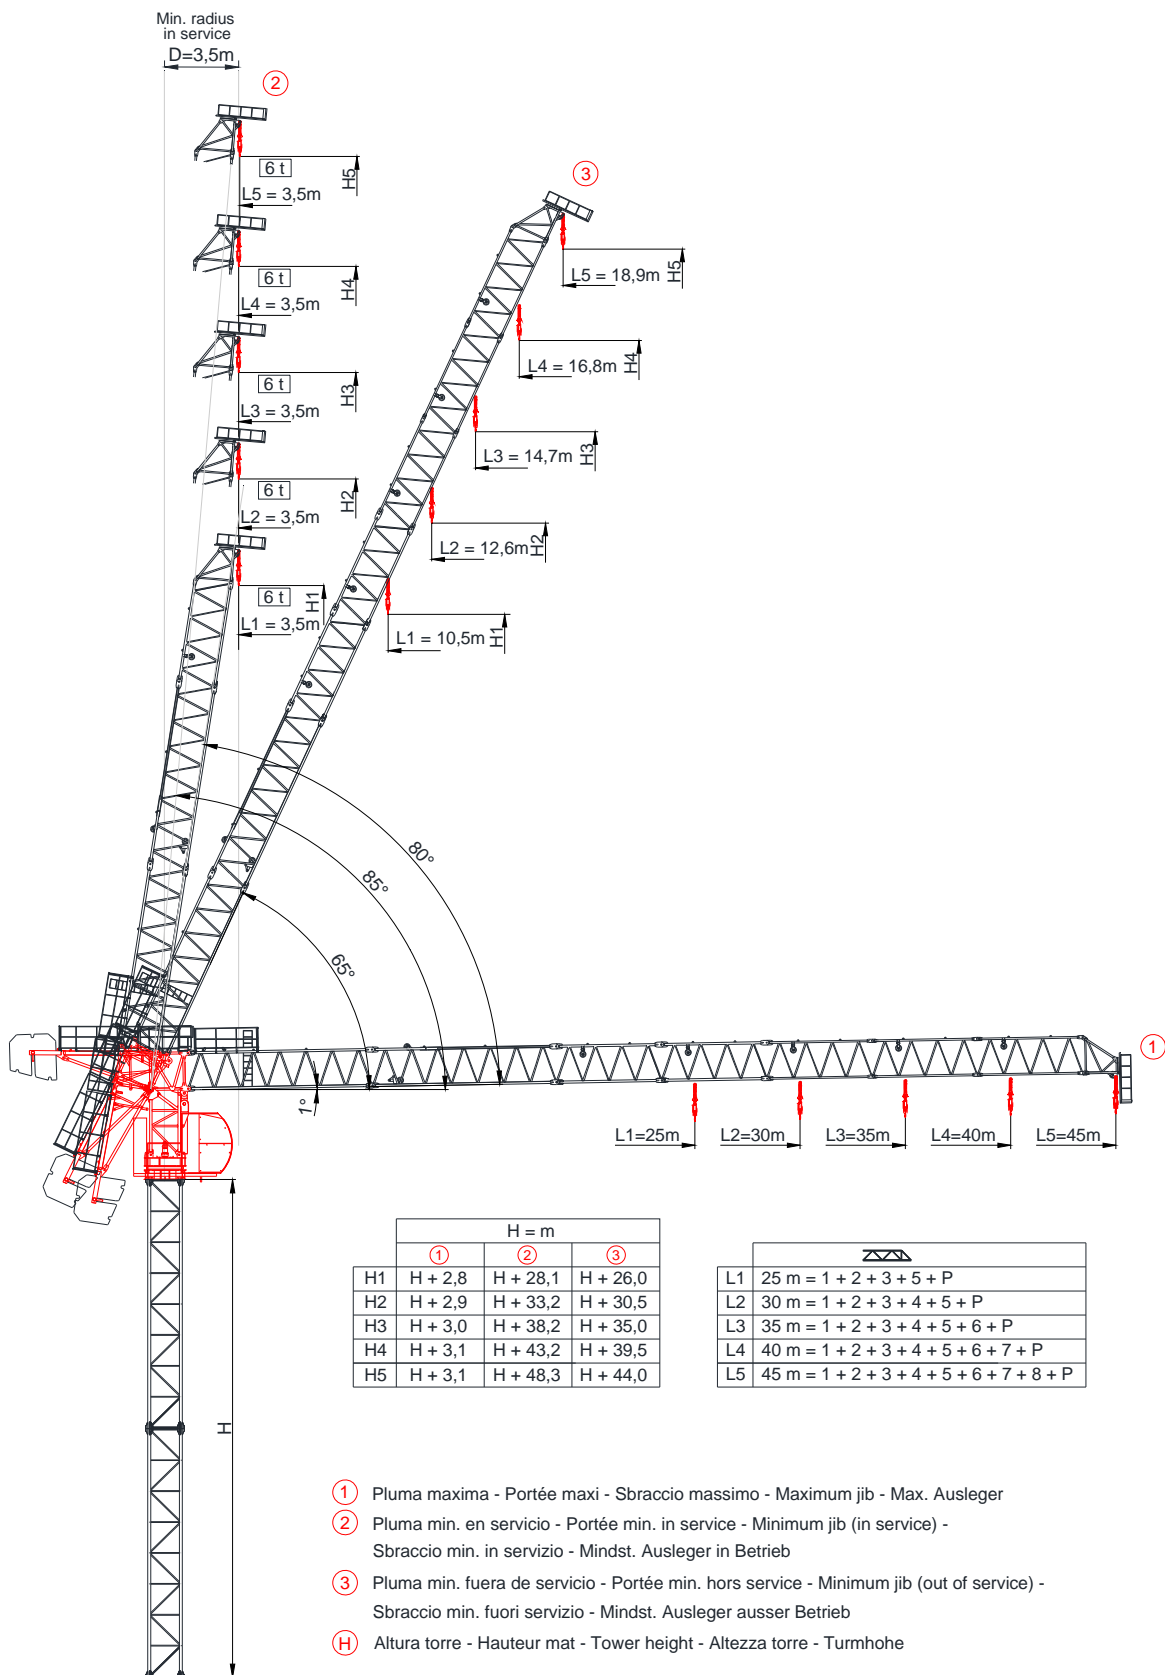



45 m



10	15	20	25	28	30	35	40	45	m	
3000	3000	3000	3000	3000	2753	2268	1885	1600	Kg	
10	15	15,2	20	25	30	35	40	45	m	
6000	6000	6000	4402	3437	2753	2268	1885	1600	Kg	





40 m



10	15	20	25	30	34,7	35	40	m	
3000	3000	3000	3000	3000	3000	2959	2500	Kg	
10	15	18,9	20	25	30	35	40	m	
6000	6000	6000	5651	4390	3543	2959	2500	Kg	





35 m



5	10	15	20	25	30	35	m	
3000	3000	3000	3000	3000	3000	3000	Kg	
10	15	20	20,8	25	30	35	m	
6000	6000	6000	6000	4859	3965	3300	Kg	





30 m




5	10	15	20	25	30	m	
3000	3000	3000	3000	3000	3000	Kg	
10	15	20	21,9	25	30	m	
6000	6000	6000	6000	5191	4200	Kg	

25 m




5	10	15	20	25	m	
3000	3000	3000	3000	3000	Kg	
10	15	19,4	20	25	m	
6000	6000	6000	5796	4500	Kg	

FEM 1005 – C25/ EN 14439 - Mástil / Masts / Maste / Mat / Torre / Torre / Комплектация башни

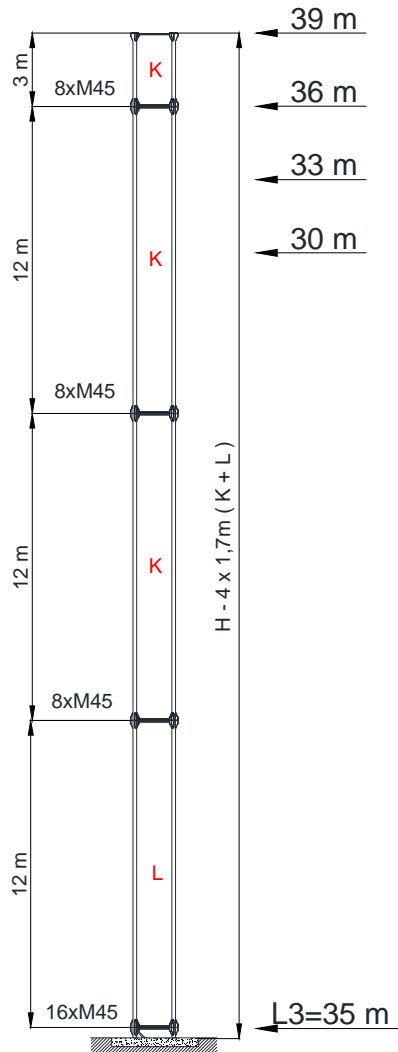

S60/R16

D

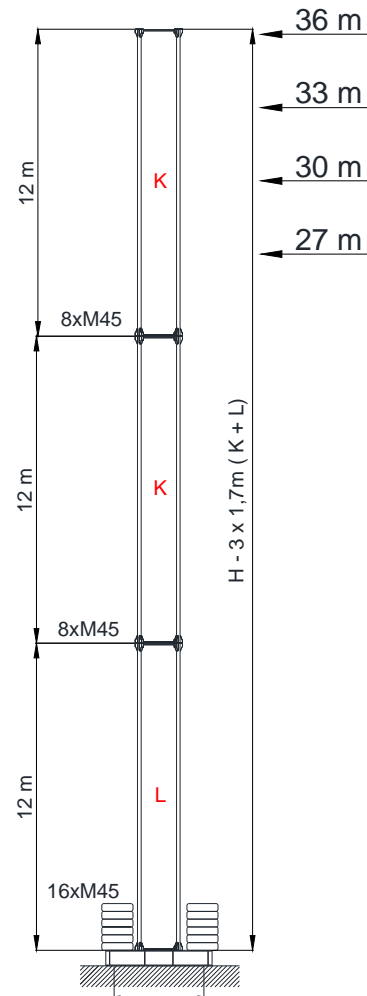






4.5 x 4.5 m






A-B-B1-C



→ Z (m)	max. H(m)
	FEM 1005 C25
30	39,0
35	36,0
40	33,0
45	30,0



→ Z (m)	max. H(m)
	FEM 1005 C25
30	36,0
35	33,0
40	30,0
45	27,0






Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы

33 Hp (24Kw) INV							
		LEBUS 550m  H.B.G. 260m Ø12			LEBUS 550m  H.B.G. 130m Ø12		
	m/min	0 → 34	0 → 54	0 → 70	0 → 17	0 → 27	0 → 35
	Kg	3000	1500	1000	6000	3000	2000
	Kw	24	24	24	24	24	24

			
		2 min. de 1° a 85° 2 minutes from 1° to 85°	
	Kw	22	
	r.p.m	0 → 0,8	
	kW	1 x 7,5kW	
	m/min	0 → 25	
	Kw	2 x 3	

		400 V 50 Hz 60 Hz	33 Hp (24 Kw) INV 54,5 Kw / 120 kVA
2000/14/CEE 2005/88/CEE	2006/95 /CEE		

		25 m	50 m	100 m
33 Hp (24 KW) INV		4 x 25 mm ²	4 x 25 mm ²	4 x 25 mm ²

- * Opcional / Optional / Opzionale
-  Elevación / Hoisting / Heben / Levage / Sollevamento
-  Elevación de pluma / Luffing / Ausleger-Einziehen / Relevage / Brandeggio
-  Orientación / Slewing / Schwenken / Orientation / Rotazione
-  Traslacion / Travelling / Schienenfahren / Translation / Traslazione
-  Cable / Rope / Seil / Câble / Fune



40" HC x 6 - HBG 30 m



x 5 - HBG 30 m